

## TECHNICAL SERVICE BULLETIN

BRITISH



LEYLAND

# Triumph

March, 1976

SUBJECT:


HEADLAMP PAINT ADHESION

MODELS:

TR7

Difficulty has been experienced on early TR7's with the paint flaking along the leading edge of the headlamp assembly (Refer to Diagram).

It is recommended when refinishing this area, to add a radius to leading edge of lamp assembly prior to painting. Please note a time of 1/2 hour per headlamp assembly will be allowed for carrying out this operation.

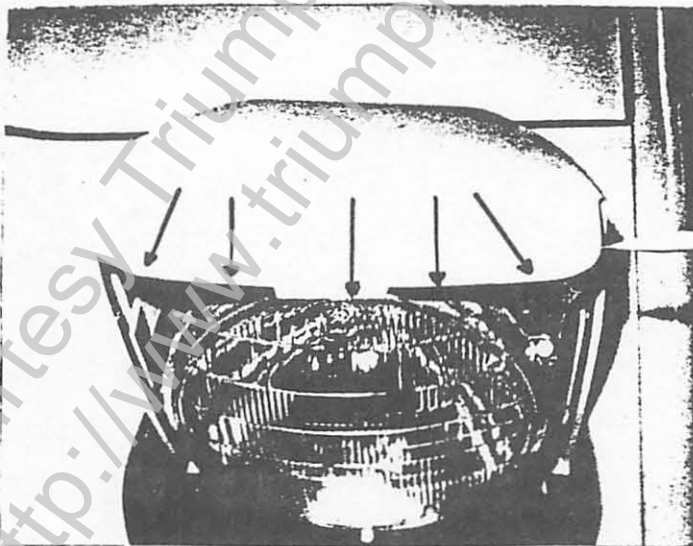

J.P.